IOTROUTER® 纵横智控

PRODUCT SPECIFICATION

ER5200



Chengdu Zongheng Intelligence Control Technology Co., Ltd.

产品介绍 PRODUCT INTRODUCTION



- 5G RedCap
- Router+DTU
- Fast Network
- Remote O&M
- Industrial Grade

The ER series, as the flagship series of industrial networking devices carefully crafted by Chengdu IOTRouter, is designed to meet the stringent requirements of efficient, stable, and secure communication in the **Industry 4.0** and **Internet of Things (IoT) era**. This series focuses on comprehensive industrial router solutions for **5G** and **high-performance** industrial network switch, aiming to provide **seamless** and **high-speed** industrial network communication platforms for enterprise level users.

As a cutting-edge product of the ER series, 5G industrial router fully utilize the **ultra-high speed** and **ultra-low latency characteristics** of 5th generation mobile communication technology, providing strong supports for industrial application scenarios such as intelligent manufacturing, remote monitoring, and autonomous driving. Whether it is **real-time** data transmission or **sufficient** bandwidth, it can ensure **efficient operation** of the production process and **instant response** of intelligent decision-making.

产品规格 PRODUCT SPECIFICATION

Model		ER5200
Communication module	5G NR Band	n1/n3/n5/n8/n28/n41/n78/n79
	4G LTE Band	B1/B3/B5/B8/B34/B38/B39/B40/B41
	WCDMA Band	B1/B5/B8
	Theoretical Speed	DL：226 Mbps / UL：120 Mbps
Ethernet	LAN	4 * 10M/100M Self-Adaptive
RS485	Number of Interfaces	1-way
	Terminals	A、B
	Baud Rate	2400~115200bps
	Data Bits	7、8
	Stop Bits	1、2
	Check Digit	NONE（No Check Digit）EVEN（Even Check）ODD（Odd Check）
	Protection	Anti-static, Anti-surge
Other Interfaces	SIM Card	1
	Modular Antenna	2
Electrical Parameters	Authentication	CE
	Adapter	12V/2A
	Operating Voltage	DC 9~36V
	Operating Current	50mA/12V
Environmental Parameters	Operating Temperature	-40~85℃
	Storage Temperature	-40~85℃
	Operating Humidity	5%~95%（No Condensation）
	Store Humidity	5%~95%（No Condensation）
Mechanical Parameters	Size	124*95*24mm
	Housing Material	Galvanized Steel
	Installation	Guide Rail
	Heat Dissipation	Passive Cooling
	REST Button	Press and Hold for 10s to Reset
EMC	Electrostatic Discharge	Air Discharge level3 ±8KV Contact Discharge level2 ±4KV
	Surge	level2 ±1KV
	Burst（EFT）	level2 ±1KV

接线说明 WIRING INSTRUCTION




ER5200 Interface Identification-1




ER5200 Interface Identification-2

接线说明 WIRING INSTRUCTION

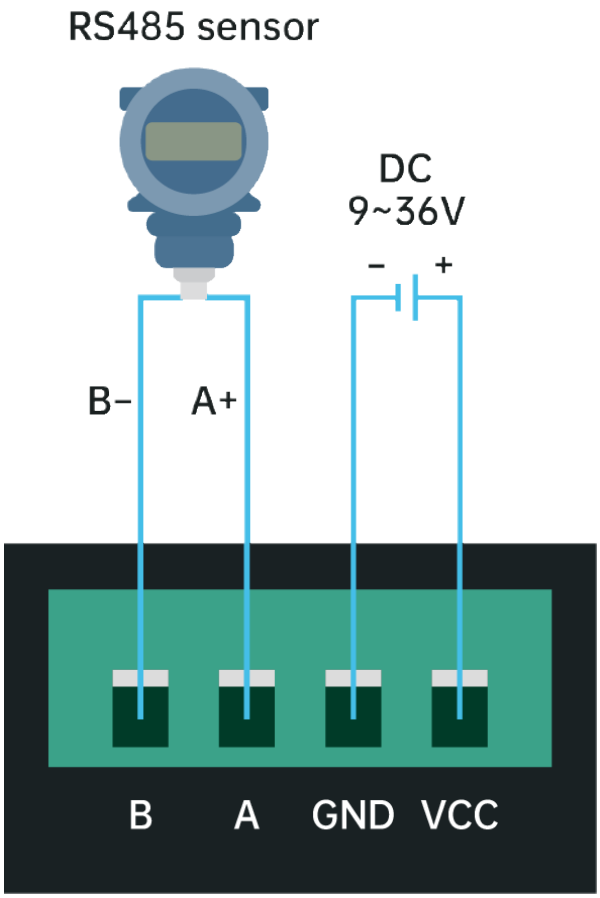

ER5000
Power & Serial port Wiring Diagram

安装说明 INSTALLATION INSTRUCTION

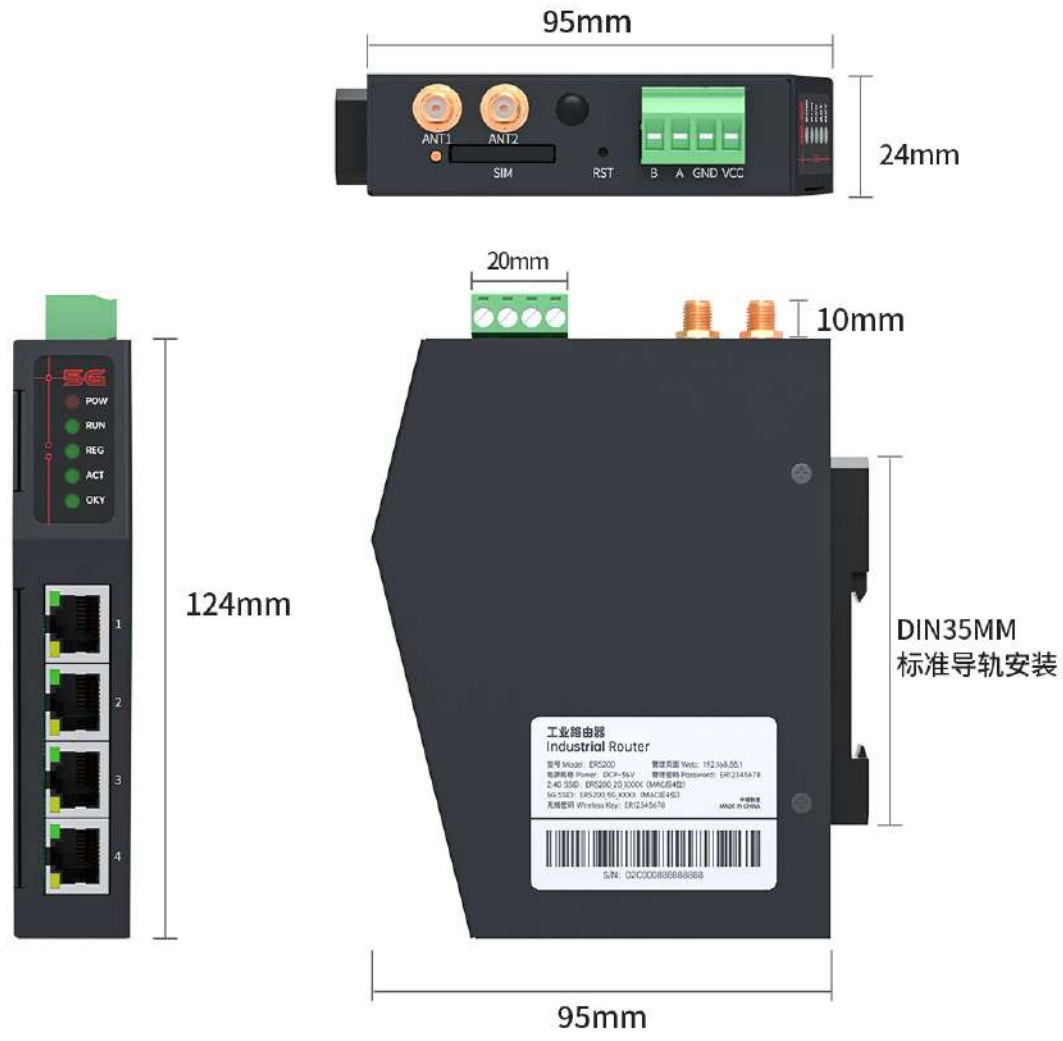

Product Size

A LEADING PROVIDER OF INTEGRATED IT AND OT PRODUCTS

R&D Center :
CHENGDU IOTRouter TECHNOLOGY CO., LTD
No. 599, Section 1, Huafu Avenue, Shuangliu District, Chengdu city, Sichuan Province, China

Website :
www.iotrouter.com

Mail :
agnes@iotrouter.com

WhatsApp